

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)


PCT

(10) International Publication Number
WO 2004/036169 A1

- (51) International Patent Classification⁷: **G01L 21/12** (72) Inventor; and
(75) Inventor/Applicant (for US only): **BORENSTEIN, Michael, D.** [US/US]; 7313 Panorama Drive, Boulder, CO 80303 (US).
- (21) International Application Number: **PCT/US2003/032497** (74) Agents: **SMITH, James, M. et al.**; Hamilton, Brook, Smith & Reynolds, P.C., 530 Virginia Road, P.O. Box 9133, Concord, MA 01742-9133 (US).
- (22) International Filing Date: 14 October 2003 (14.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/273,402 16 October 2002 (16.10.2002) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 10/273,402 (CON)
Filed on 16 October 2002 (16.10.2002)
- (71) Applicant (for all designated States except US): **HELIX TECHNOLOGY CORPORATION** [US/US]; Mansfield Corporate Center, Nine Hampshire Street, Mansfield, MA 02048-9171 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: APPARATUS AND METHODS FOR HEAT LOSS PRESSURE MEASUREMENT

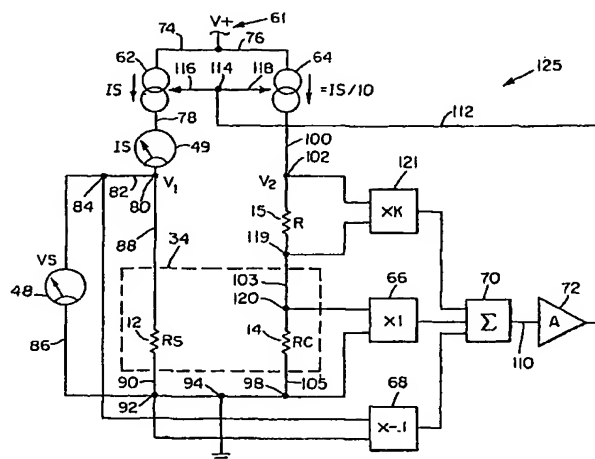

(57) Abstract: A heat loss gauge for measuring gas pressure in an environment includes a resistive sensing element and a resistive compensating element. The resistive compensating element is in circuit with the sensing element and is exposed to a substantially matching environment. An electrical source is connected to the sensing element and the compensating element for applying current through the elements. The current through the sensing element is substantially greater than the current through the compensating element. Measuring circuitry is connected to the sensing element and the compensating element for determining gas pressure in the environment to which the sensing element and compensating element are exposed based on electrical response of the sensing element and the compensating element.

WO 2004/036169 A1

WO 2004/036169 A1**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2004/036169

PCT/US2003/032497

1

APPARATUS AND METHODS FOR HEAT LOSS PRESSURE MEASUREMENT

RELATED APPLICATIONS

This application is a continuation of U.S. Application No. 10/273,402, filed
5 October 16, 2002. The entire teachings of the above application are incorporated
herein by reference.

BACKGROUND

Because the rate of heat transfer through a gas is a function of the gas
pressure, under certain conditions measurements of heat transfer rates from a heated
10 sensing element to the gas can, with appropriate calibration, be used to determine the
gas pressure. This principle is used in the well known Pirani gauge (shown in
schematic form in Figs. 1a and 1b), in which heat loss is measured with a
Wheatstone bridge network which serves both to heat the sensing element and to
measure its resistance.

15 Referring to Figure 1a, in a Pirani gauge the pressure sensor consists of a
temperature sensitive resistance R_S connected as one arm of a Wheatstone bridge.
 R_2 is typically a temperature sensitive resistance designed to have a negligible
temperature rise due to the current i_2 . R_3 and R_4 are typically fixed resistances. R_S
and typically R_2 are exposed to the vacuum environment whose pressure is to be
20 measured. Figure 1b illustrates an alternative bridge configuration.

Pirani gauges have been operated with constant current i_1 (as shown in U.S.
Patent 3,580,081), or with constant voltage across R_S . In these methods, an
electrical imbalance of the bridge is created which reflects gas pressure. Pirani
gauges have also been operated with constant resistance R_S (as shown in U.S. Patent
25 2,938,387). In this mode, the rate at which energy is supplied is varied with changes
in gas pressure, so the rate of change in energy supplied reflects changes in gas

WO 2004/036169

PCT/US2003/032497

2

pressure. Each method of operation has differing advantages and disadvantages, but the following discussion pertains particularly to the constant resistance method and the configuration of Figure 1a.

5 Voltage V_B is automatically controlled to maintain the voltage difference between A and C in Fig. 1a at zero volts. When the potential drop from A to C is zero, the bridge is said to be balanced. At bridge balance the following conditions exist:

$$i_s = i_2, \quad (1)$$

$$i_4 = i_3 \quad (2)$$

$$10 \quad i_s R_S = i_4 R_4, \quad (3)$$

$$\text{and } i_2 R_2 = i_3 R_3 \quad (4)$$

Dividing Eq. 3 by Eq. 4 and using Eq. 1 and 2 gives

$$R_S = \beta R_2 \quad (5)$$

$$\text{where } \beta = \frac{R_4}{R_3} \quad (6)$$

15 Thus, at bridge balance R_S is a constant fraction β of R_2 .

To achieve a steady state condition in R_S at any given pressure, Eq. 7 must be satisfied:

$$\begin{aligned} \text{Electrical power input to } R_S &= \text{Power radiated by } R_S + \\ &\text{Power lost out ends of } R_S + \text{Power lost to gas by } R_S \end{aligned} \quad (7)$$

20 A conventional Pirani gauge is calibrated against several known pressures to determine a relationship between unknown pressure, P_x , and the power loss to the

WO 2004/036169

PCT/US2003/032497

3

gas or more conveniently to the bridge voltage. Then, assuming end losses and radiation losses remain constant, the unknown pressure of the gas P_x may be directly determined by the power lost to the gas or related to the bridge voltage at bridge balance.

5 Because Pirani gauges may be designed to have wide range and are relatively simple and inexpensive, there is a long-felt need to be able to use these gauges as a substitute for much higher priced gauges such as capacitance manometers and ionization gauges. However, existing designs leave much to be desired for accurate pressure measurement, especially at lower pressures.

10 Prior to 1977, the upper pressure limit of Pirani gauges was approximately 20 Torr due to the fact that at higher pressures the thermal conductivity of a gas becomes substantially independent of pressure in macroscopic size devices. One of the present inventors helped develop the *CONVECTRON*[®] Gauge produced and sold by the assignee (Granville-Phillips Company of Boulder Colorado) since 1977
15 which utilizes convection cooling of the sensing element to provide enhanced sensitivity from 20 to 1,000 Torr. Hundreds of thousands of *CONVECTRON*[®] Gauges¹ have been sold worldwide. Recently several imitations have appeared on the market.

20 Although the *CONVECTRON*[®] Gauge filled an unsatisfied need, it has several disadvantages. It has by necessity large internal dimensions to provide space for convection. Therefore, it is relatively large. Because convection is gravity dependent, pressure measurements at higher pressures depend on the orientation of the sensor axis. Also, because the pressure range where gas conduction cooling is predominant does not neatly overlap the pressure range where convection cooling
25 occurs, the *CONVECTRON*[®] Gauge has limited sensitivity from approximately 20 to 200 Torr.

30 To help avoid these difficulties, microminiature Pirani sensors have been developed which utilize sensor-to-wall spacings on the order of a few microns rather than the much larger spacings, e.g., 0.5 in., previously used. See for example U.S. Patents 4,682,503 to Higashi et al. and 5,347,869 to Shie et al. W. J. Alvesteffer et al., in an article appearing in J. Vac. Sci. Technol. A 13(6), Nov/Dec 1995, describe the most recent work on Pirani gauges known to the present inventors. Using such

WO 2004/036169

PCT/US2003/032497

4

small sensor to wall spacings provides a pressure dependent thermal conductivity even at pressures above atmospheric pressure. Thus, such microscopic sensors have good sensitivity from low pressure to above atmospheric pressure and function in any orientation.

5 There are a number of problems with previous attempts to develop microminiature gauges. Although microminiature sensors provide good sensitivity over a large pressure range independent of orientation, their design is extremely complex and fabrication requires numerous elaborate processing steps in highly specialized equipment costing hundreds of thousands of dollars.

10 Microminiature sensors suffer from the same type of ambient temperature-caused errors as do macroscopic sensors. All of the heat loss terms in Eq. 7 are dependent on ambient temperature and on sensing element temperature at any given pressure. Thus, any attempt at pressure measurement with a Pirani gauge without temperature correction will be confused by non-pressure dependent power
15 losses caused by changes in ambient temperature. All modern Pirani gauges attempt to correct for the errors caused by ambient temperature changes. A widely used means for correcting for such errors is to use for R2 a temperature sensitive compensating element RC in series with a fixed resistance R, as shown in Figs. 1a and 1b.

20 British Patent GB 2105047A discloses the provision of an additional resistor to provide a potential divider. J.H. Leck, at page 58 of Pressure Measurement in Vacuum, Chapman and Hall: London (1964) notes that Hale in 1911 made R2 of the same material and physical dimensions as RS in his Pirani gauge. R2 was sealed off in its own vacuum environment and placed in close proximity to RS. When the
25 pressures at R2 and RS were equal, excellent temperature compensation was achieved. However, at other pressures this means of temperature compensation is not very effective.

 To avoid the extra cost and complexity of evacuating and sealing off R2 in a separate bulb, R2 is conventionally placed in the same vacuum environment as RS.
30 By making R2 with a relatively large thermal mass and large thermal losses, self heating of R2 can be made negligible. Leck recommends that R2 be "made in two sections, for example, one of copper and the other Nichrome wire ... so that the

WO 2004/036169

PCT/US2003/032497

5

overall temperature coefficient (of R2) just matches that of the Pirani element itself (RS)." According to Leck, this method of temperature compensation has been used by Edwards High Vacuum of Great Britain in the METROVAC® brand gauge. A similar temperature compensation arrangement is used in the CONVECTRON® brand gauge.

However, this technique (using two or more materials in R2 having different temperature coefficients of resistance to approximate the temperature coefficient of RS) is effective only over a narrow range of pressure. In fact the compensation can be made exact only at one, or at most several temperatures as noted in U.S. Patent 4,541,286, which discloses this form of temperature compensation in a Pirani gauge. Also, the inventors have found that configurations with a large thermal mass significantly increase the response time of the gauge to sudden changes in ambient temperature.

The inventors have also found, through extensive computer simulation, that using equal temperature coefficients for RS and R2 as recommended by Leck and as practiced in the prior art does not provide an entirely accurate temperature compensation. The inventors have also found that at pressures less than approximately 5×10^{-3} Torr, the end losses exceed all other losses combined. The relative loss components as determined by this research (radiation loss, end loss and gas loss components of total loss) are shown in the graph of Fig. 2. At 1×10^{-5} Torr, the end losses are over 1000 times greater than the gas loss and radiation losses are approximately 100 times greater than the gas loss.

Therefore, temperature change effects in prior art Pirani Gauges are especially troublesome at very low pressures where gas conduction losses are very low. Prior art heat loss gauges cannot measure very low pressures accurately, for example, 1×10^{-5} Torr. The inventors have discovered that this limitation is a result of failure to maintain end losses in the sensing element sufficiently constant when ambient temperature changes. The Alvesteffer-type Pirani gauge has the capability of indicating pressure in the 10^{-5} Torr range, but does not provide an accurate indication within that range. For example, if the end losses are not held constant to one part in 5,000 in a typical Pirani gauge, a pressure indication at 1×10^{-5} Torr may be off by 50% to 100%.

WO 2004/036169

PCT/US2003/032497

6

The following analysis shows why prior art designs are ill-suited to correct adequately for ambient temperature changes at low pressures. For convenience in examining the prior art, the problems are explained using examples of gauges with relatively large spacing of sensor element to wall. It should be understood that the same type of problems exist in the much more complex geometries of microminiature gauges, with sensing element-to-wall spacings on the order of a few microns.

Fig. 3 is a schematic representation of a portion 302 of a conventional Pirani gauge using a small diameter wire sensing element 304 and a compensating element 303. Those familiar with Pirani gauge design will appreciate that the components in Fig. 3 are not shown to scale, for ease of explanation and understanding. Typically, small diameter wire sensing element 304 is electrically and thermally joined to much larger electrical connectors 306, 307 which are thermally joined to much larger support structures 308, 309. Let T_{AL} represent the temperature in support structure 308 at the left end of sensing element 304 and T_{AR} represent the temperature in support structure 309 at the right end at any given time t . Let T_{SL} and T_{SR} represent the temperatures at left sensing element connector 306 and right sensing element connector 307 respectively. Let T_{CL} and T_{CR} represent the temperatures at left compensating element connector 310 and right compensating element connector 311 respectively. Let T_{XL} and T_{XR} represent the temperatures a distance ΔX from connectors 306 and 307 respectively. In prior art designs, it has apparently been assumed that all of these temperatures are the same. However, the inventors have found that even seemingly negligible differences assume great importance for low pressure accuracy.

To better understand temperature compensation requirements, it is important to note several facts.

(1) At low pressures, the temperature of RC is determined predominantly by heat exchange between the compensating element connections and the compensating element. This is because at ambient temperature and low pressures, radiation and gas conduction are very inefficient means of exchanging heat from the compensating element to its surroundings relative to heat conduction through the ends of the compensating element. Thus, at low pressures the compensating element

WO 2004/036169

PCT/US2003/032497

7

temperature will be very close to the average of the temperatures of the connectors at each end of the compensating element as shown in Eq. 8.

$$T_{AVG} = \frac{T_{CL} + T_{CR}}{2} \quad (8)$$

(2) The temperature of the electrically heated sensing element varies from the ends to center, increasing with distance from the cooler supports. Using finite element analysis the inventors have simulated the temperature distribution along the sensing element. It has been found that with equal temperature coefficients of resistance for RS and RC, the temperature Tn of any segment n of the sensing element changes with changes in average temperature T_{AVG} of the compensating element RC at constant pressure at bridge balance so as to maintain a constant difference ΔTn=Tn-T_{AVG}. The difference ΔTn is a function of β and R where R=R2-RC.

(3) According to Eq. 5, the sensing element resistance RS at bridge balance will be maintained at a resistance β times the resistance element R2. As the ambient temperature increases, the compensating element connectors also increase in temperature and thus the temperature and resistance of RC will increase according to Eq. 8. Any increase in the temperature and therefore the resistance of RC causes an increase in the temperature and resistance of all segments of RS at bridge balance.

(4) The power losses out the ends of the sensing element depend on the temperature gradient γ at the ends of the sensing element according to Eq. 9:

$$\text{Power lost out end} = k \gamma \quad (9)$$

where k is a constant and

$$\gamma_L = \frac{T_{XL} - T_{SL}}{\Delta X} \quad \text{at left end} \quad (10)$$

WO 2004/036169

PCT/US2003/032497

8

$$\gamma_R = \frac{T_{XR} - T_{SR}}{\Delta X} \quad \text{at right end.} \quad (11)$$

If γ_L and or γ_R vary for any reason, then the end losses will change and the pressure indication will be erroneous.

To understand in detail a significant deficiency in the prior art of temperature compensation at low pressures, assume that from a steady state, T_{AR} is increased slightly for example by changes in the local ambient temperature environment of the right support structure. Assume T_{AL} remains unchanged. Because T_{AL} is assumed not to change, T_{CL} and T_{SL} will remain unchanged. However, the increase in T_{AR} will cause T_{CR} to increase by conduction of heat through the connection. Thus,

10 $T_{AVG} = \frac{T_{CL} + T_{CR}}{2}$ will increase. An increase in T_{AVG} will cause an increase in T_{XL}

and T_{XR} at bridge balance, which will produce changes in γ_L and γ_R . These changes in γ_L and γ_R will change the end loss term in Eq. 7, causing an error in pressure measurement dependent on the size of the changes in γ_L and γ_R .

The inventors have determined that unless T_{AL} changes in substantially the same way as T_{AR} , sensing element end losses will not remain unchanged whenever ambient temperature changes. Prior art Pirani gauges have not been specifically designed to maintain $T_{AL}=T_{AR}$ to the degree necessary for accurate low pressure measurement.

15

To understand another important deficiency in prior art temperature compensation, assume that from a steady state, ambient temperature is increased and that ambient temperature conditions are such that $T_{AL}=T_{AR}$. Further assume the sensing element connectors are of equal length but that the right compensating element connector is substantially longer than the left compensating element connector as is the case in a popular prior art Pirani gauge. Thus, $T_{SL}=T_{SR}$ but T_{CR} will lag behind T_{CL} because of the assumed differences in length. During this lag time when $T_{CL} \neq T_{CR}$, T_{AVG} will change, thus changing T_{XL} and T_{XR} at bridge balance. Thus, γ_L and γ_R will continually change during the lag time, producing errors in low pressure indication.

20

25

WO 2004/036169

PCT/US2003/032497

9

The inventors have determined that unless the sensing element and compensating element connectors have substantially identical physical dimensions and substantially identical thermal properties, sensing element end losses will not remain unchanged when ambient temperature changes. Prior art Pirani gauges have not been specifically designed so that sensing and compensating element connectors have identical physical dimensions and thermal properties.

Another significant deficiency arises (as the inventors have discovered) from differences in mass between the compensating element and the sensing element. Assume that the mass of the compensating element is substantially larger than that of the sensing element as is typically the case. With prior art Pirani gauges it is common practice to make the compensating element large relative to the sensing element and to provide a relatively large heat loss path to the compensating element surroundings so that the heat arising from dissipation of electrical power in RC can be readily dispersed. From a steady state, assume that ambient temperature increases and that $T_{AL}=T_{AR}$ at all times. Thus, it will take a longer time for the compensating element to reach a new steady state temperature relative to the time it will take T_{SL} and T_{SR} to reach a new steady state temperature. During this time (which has been observed to be of several hours duration in a popular prior art Pirani gauge) T_{AVG} will continually change, thus continually changing T_{XL} and T_{XR} at bridge balance. Thus, γ_L and γ_R will change during the lag time, sensing element end losses will not remain constant, and errors will be produced in low pressure measurement.

The same type of problems occur if the compensating element is designed to change temperature at a different rate than does the sensing element with change in ambient temperature at bridge balance. Prior art designs such as the Alvesteffer-type device have this deficiency.

From their research, the inventors have determined that, unless the compensating element has been designed to change temperature at the same rate as the sensing element, sensing element end losses continue to change long after ambient temperature has stabilized at a new value. Yet, prior art Pirani gauges have not been designed to meet this requirement.

It has long been known to use for R2 a compensating element RC, with substantially the same temperature coefficient of resistance as the sensing element,

WO 2004/036169

PCT/US2003/032497

10

in series with a temperature insensitive resistance element R so as to provide temperature compensation for gas losses and end losses which vary as the temperature difference between the sensing element and its surroundings. This method of temperature compensation has been employed in the *CONVECTRON*®

5 Gauge for many years and is also used in the Alvesteffer gauge.

This method of temperature compensation assumes that if (1) the temperature coefficients of resistance of the sensing and compensating elements are equal; and (2) the change in sensing element resistance can be made to rise in tandem with change in compensating element resistance, then (3) the temperature of
10 the sensing element will rise in tandem with ambient temperature changes. Satisfying these two assumptions is highly desirable, of course, because doing so would assure that the temperature difference between the heated sensing element and the surrounding wall at ambient temperature would remain constant as ambient temperature changes.

15 However, the inventors have found that prior art gauges which utilize a constant resistance R in series with a temperature sensitive resistance RC for R2 provide only partial temperature compensation as will now be explained.

Assume that in Fig. 1a, R2 is composed of a temperature sensitive compensating element RC and a temperature insensitive resistance R so that

20
$$R2 = RC + R \quad (12)$$

Thus, Eq. 5 derived above for bridge balance may be written as

$$RS = \beta (RC + R) \quad (13)$$

where β is defined by Eq. 6 above.

Further, assume when the ambient temperature environment of the gauge is equal to
25 T_1 that the sensing element operates at temperature T_{S1} and the compensating element operates at temperature T_{C1} . Thus when

WO 2004/036169

11

PCT/US2003/032497

$$T_{\text{AMBIENT}} = T_1 \quad (14)$$

Eq. 13 may be written as

$$RS(T_1)(1 + \alpha_s (T_{s1} - T_1)) = \beta [RC(T_1)(1 + \alpha_c (T_{c1} - T_1)) + R] \quad (15)$$

Here, $RS(T_1)$ is the resistance of the sensing element at temperature T_1 , α_s is
 5 the temperature coefficient of resistance of RS at T_1 , $RC(T_1)$ is the resistance of the
 compensating element at temperature T_1 , and α_c is the temperature coefficient of
 resistance of R_c at T_1 . Thus, when

$$T_{\text{AMBIENT}} = T_2$$

Eq. 13 may be written as

$$10 \quad RS(T_1)(1 + \alpha_s (T_{s2} - T_1)) = \beta [RC(T_1)(1 + \alpha_c (T_{c2} - T_1)) + R] \quad (16)$$

Solving Eq. 15 for T_{s1} gives

$$T_{s1} = \left[\frac{\beta}{RS(T_1)} [RC(T_1)(1 + \alpha_c (T_{c1} - T_1)) + R] - 1 \right] / \alpha_s + T_1 \quad (17)$$

Solving Eq. 16 for T_{s2} gives

$$T_{s2} = \left[\frac{\beta}{RS(T_1)} [RC(T_1)(1 + \alpha_c (T_{c2} - T_1)) + R] - 1 \right] / \alpha_s + T_1 \quad (18)$$

WO 2004/036169

PCT/US2003/032497

12

Subtracting Eq. 17 from Eq. 18 gives the temperature change ΔT in the sensing element RS when ambient temperature changes from T_1 to T_2 . Thus,

$$\Delta T = T_{s2} - T_{s1} = \beta \left(\frac{RC(T_1)}{RS(T_1)} \right) \left(\frac{\alpha_c}{\alpha_s} \right) (T_{c2} - T_{c1}) \quad (19)$$

Note that an effective compensating element is designed so that its temperature closely follows ambient temperature. Thus, to a very good approximation,

$$T_{c2} - T_2 = T_{c1} - T_1$$

or

$$T_{c2} - T_{c1} = T_2 - T_1 \quad (20)$$

Thus, Eq. 19 may be written as

$$\Delta T = \beta \left(\frac{RC(T_1)}{RS(T_1)} \right) \left(\frac{\alpha_c}{\alpha_s} \right) (T_2 - T_1) \quad (21)$$

It is evident from Eq. 21 that the temperature change ΔT in the sensing element RS will be equal to the change in ambient temperature $T_2 - T_1$ only if

$$\beta \left[\frac{RC(T_1)}{RS(T_1)} \right] \left[\frac{\alpha_c}{\alpha_s} \right] = 1 \quad (22)$$

Prior art gauges using a temperature sensitive compensating element RC in series with a fixed resistance R for R2 in Fig. 1a provide only partial temperature compensation depending on the choice of β . Commercially available gauges having

WO 2004/036169

PCT/US2003/032497

13

the design described by Alvesteffer et al., the most recent work on Pirani gauges known to the present inventors, would not satisfy Eq. 22.

As a third problem with prior art gauge designs, the inventors have found that the level of power dissipation in R2 adversely affects accuracy. Prior art Pirani
5 gauges, when configured as in Fig. 1a, have the same pressure dependent current in RS as is in the compensating element at bridge balance. When configured as in Fig. 1b, at balance the same pressure dependent voltage is applied across R2 as across RS. Of course, a pressure dependent current in R2 will cause the temperature of RC to rise above ambient temperature by an amount which varies with pressure.

10 Prior art Pirani gauges typically use a compensating element of much larger physical dimensions than the sensing element, to dissipate the heat and thus prevent excessive temperature in the compensating element. As noted above, different physical dimensions for the sensing and compensating elements cause measurement errors when ambient temperature changes.

15 A fourth problem is that prior art Pirani gauges produce shifts in pressure indications at low pressures when ambient temperature changes. Prior art Pirani gauges have used a variety of components in attempting to maintain the power lost by the sensing element unchanged as ambient temperature changes. For example, in U.S. Pat. 4,682,503 thermoelectric cooling is used to control ambient temperature
20 and thus minimize ambient temperature changes.

In the device disclosed in U.S. Pat. 4,541,286, a thermally sensitive element is mounted adjacent to the compensating arm of the bridge (actually glued to the exterior of the vacuum enclosure in a commercial version). Alvesteffer et al. use an additional element (designated therein as R4) in the bridge to help compensate for
25 the fact that the temperature coefficient of resistance is slightly different for the sensing element at operating temperature, compared to the compensating element at ambient temperature. Although each of these prior art hardware fixes remove some of the errors caused by changes in ambient temperature, none of them removes substantially all of the errors. Thus prior art Pirani gauges produce significant shifts
30 in pressure indications at low pressures when ambient temperature changes.

Another prior system, disclosed in U.S. Patent 5,608,168, links various electrical measurements of the bridge (or approximations thereof) and determines the

WO 2004/036169

PCT/US2003/032497

14

value or temperature of the temperature dependent resistance, and takes this parameter into account in determining the pressure measurement. However, this system has increased complexity because of the need to measure temperatures or other values.

5 Thus, there is a need for an improved Pirani-type gauge which overcomes these problems.

SUMMARY OF THE INVENTION

The present invention provides improvements for heat loss pressure measurement which cooperate synergistically to provide significantly improved low, mid-range and high pressure measurement accuracy, thus, permitting the range of accurate pressure measurement to be extended to lower and to higher pressures within a single gauge.

As a first improvement, a small diameter wire sensing element is positioned in the same plane as and spaced from a small diameter wire compensating element with two parallel flat thermally conductive plates, each spaced 15 microns from the sensing and compensating elements. In this manner, the inventors have achieved high relative sensitivity in simple geometry without relying on convection. The extreme complexity and cost of microminiature Pirani gauge designs and the several disadvantages of convection cooling of the sensing element are simultaneously avoided.

The inventors have found that this extremely simple, small, and inexpensive measuring means gives results up to atmospheric pressure comparable to those obtained with very complex microminiature Pirani gauges and to those obtained with much larger, position-sensitive convection-cooled Pirani gauges. Surprisingly, this improvement also provides a sensing element with a volume of only 3% that of the sensing element in the microminiature Alvesteffer gauge. The compensating element in the new device has a volume of less than 0.5% of the Alvesteffer-type compensating element.

The present invention also provides improved temperature correction. The inventors have found that the accuracy of low pressure measurement can be significantly improved by better maintaining constant the temperature gradient γ at

WO 2004/036169

PCT/US2003/032497

15

the ends of the sensing element (see Eqs. 10 and 11). The inventors have found that constancy of γ can be achieved by simultaneously:

1. Using sensing and compensating elements with substantially identical physical dimensions, thermal properties and resistance properties;
- 5 2. Using sensing element and compensating element connections with substantially identical physical dimensions, thermal properties and resistance properties;
3. Using element connections with substantially identical and large thermal conductances to a region of substantially uniform temperature for all
- 10 connections; and
4. Locating the sensing and compensating elements in the same vacuum environment.

In the present invention, Eq. 22 is satisfied at all times because the gauge is designed so that

15
$$RC(T_A) = RS(T_A) \quad (23)$$

where T_A is ambient temperature, and where

$$\alpha_C = \alpha_S \quad (24)$$

$$\beta = 1 \quad (25)$$

Another significant improvement is realized by providing negligible heating
20 in the compensating element. The inventors have modified the conventional Wheatstone bridge to provide independent heating means for the sensing element, while producing substantially zero heating in any of the other three arms of the bridge. Thus, the compensating element can be made with identical dimensions of the sensing element as well as identical physical properties. A DC heating current is
25 used and confined to only the sensing element. A relatively small AC signal is used to sense bridge balance.

WO 2004/036169

PCT/US2003/032497

16

An additional performance improvement is realized by providing a new method of pressure compensation that results in accurate pressure indication at all pressures. In particular, the inventors have discovered that an accurate indication of an unknown pressure P_x at bridge balance may be calculated from a simple equation of the form of Eq. 26.

$$P = f(VS, IS) \quad (26)$$

Where VS is the voltage drop across the sensing element and IS is the current in the sensing element. The particulars of Eq. 26 are derived from paired values of VS_c and IS_c obtained by calibration methods for multiple known values of pressure P_c and ambient temperature spread across the pressure and temperature ranges of interest, using three-dimensional curve fitting software. VS_x and IS_x are measured at the unknown pressure P_x at bridge balance and substituted into Eq. 26. Then, P_x is calculated using a microprocessor or the like.

In this manner, the present invention provides significant advancements in Pirani gauge accuracy, production cost, and package size.

The present invention further includes a heat loss gauge for measuring gas pressure in an environment. The gauge includes a resistive sensing element and a resistive compensating element in circuit with the sensing element and being exposed to a substantially matching environment. An electrical source is connected to the sensing element and compensating element for applying current through the elements. The current through the sensing element is substantially greater than the current through the compensating element. Measuring circuitry is connected to the sensing element and the compensating element for determining gas pressure in the environment to which the sensing element and compensating element are exposed based on electrical response of the sensing element and the compensating element.

In some embodiments, separate currents flow through the sensing element and the compensating element. Current is applied to heat the sensing element to a temperature at which the resistance of the sensing element matches the combined resistance of the compensating element plus the value of a constant number of ohms. In embodiments where the compensating element is positioned in series with a non-

WO 2004/036169

PCT/US2003/032497

17

temperature-sensitive resistive element, current is applied to heat the sensing element to a temperature at which the resistance of the sensing element matches the combined resistance of the compensating element and the non-temperature-sensitive resistive element. Gas pressure is determined based on heating current through the sensing element and resulting voltage across the sensing element. In one embodiment, separate DC currents flow through the sensing element and the compensating element. The current through the compensating element is a predetermined fraction of the current through the sensing element so that the currents have a defined ratio. Feedback circuitry controls the levels of current through the sensing element and the compensating element. In another embodiment, a sensing current flows through both the sensing element and the compensating element, and a separate heating current flows through the sensing element.

In further embodiments, the sensing and compensating elements are of different lengths. In some embodiments, the compensating element is about 5%-8% shorter in length, for 5%-8% lower resistance than the sensing element. In a specific embodiment, the compensating element is 6%-7% shorter, about 6%-7% lower resistance, than the sensing element. In other embodiments, a parallel resistor is positioned across one of the sensing and compensating elements to trim the relative resistances.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

Figures 1a and 1b are simplified schematic diagrams of conventional Pirani gauges;

Figure 2 is a graph showing the components of heat loss in a conventional Pirani gauge, as discovered through the inventors' research;

WO 2004/036169

PCT/US2003/032497

18

Figure 3 is a schematic representation of a conventional Pirani Gauge using a small diameter wire for the sensing element;

Figure 4a is a portion of an improved heat loss gauge according to the present invention, and Figure 4b is a cross-sectional view of the portion shown in Figure 4a;

5 Figure 5a is an enlarged cross-sectional view of the ends of an improved heat loss gauge according to the present invention, showing support and connection of sensing and compensating elements;

10 Figure 5b is a cross-sectional view showing one embodiment of a mechanism according to the present invention for maintaining spacing between heat conducting plates and a sensing element and compensating element, respectively;

Figure 6 is a schematic diagram showing an independent heating arrangement for a sensing element according to the present invention;

Figure 7 is a schematic diagram showing another independent heating arrangement for a sensing element according to the present invention; and

15 Figure 8 is a schematic diagram showing yet another independent heating arrangement for a sensing element according to the present invention.

Figure 9 is a schematic drawing of a portion of the circuit of Figure 7 having a trim resistor connected in parallel with the compensating element in an embodiment of the present invention.

20 DETAILED DESCRIPTION OF THE INVENTION

A description of preferred embodiments of the invention follows. The invention is first described in terms of four categories of improvements to conventional Pirani gauge designs. In a particularly preferred embodiment, the four improvements are used together, and combine synergistically to provide a Pirani
25 gauge having substantially improved performance characteristics. Additional embodiments of the present invention are then described thereafter.

Improvement 1

The first category of improvements will be discussed with reference to Figures 4a and 4b. Figure 4a is a side view of a portion 10 of an improved heat loss

WO 2004/036169

PCT/US2003/032497

19

gauge (not to scale). Figure 4b is a sectional view of portion 10 taken along line 4b-4b in Figure 4a. As shown in Figures 4a and 4b, a small diameter wire sensing element 12 is located in the same plane and spaced a distance d from a small diameter wire compensating element 14. Spacing d between sensing element 12 and compensating element 14 is preferably approximately 0.030 in. but may range from 0.010 in. to 0.200 in. Parallel plates 16 and 16' are provided proximate to and parallel to sensing element 12 and compensating element 14.

Parallel plates 16 and 16' are positioned a distance S from sensing element 12 and compensating element 14. S is preferably 0.0007 in. but may range from 0.0002 in. to 0.002 in. Sensing element 12 is made of a material with a high temperature coefficient of resistance, such as pure tungsten, which may be gold plated to help assure a constant emissivity.

The diameter of sensing element 12 is preferably 0.0005 in. but may range from 0.0001 in. to 0.002 in. Although a cylindrical wire shape is preferred, other shapes such as a ribbon may be used for both the sensing and compensating elements. The length of sensing element 12 is preferably 1 in. but may range from 0.25 in. to 3 in.

Compensating element 14 is made of the same material as the sensing element 12 with the same physical dimensions, and with the same thermal and resistance properties.

Portion 10 of the heat loss gauge may be installed in a measuring circuit of the type shown in Fig. 6, in a manner which will be described in more detail below.

Parallel plates 16 and 16' conduct heat and thereby tend to equalize -temperature gradients along heated sensing element 12 and between the ends of sensing element 12 and compensating element 14. In this manner, the invention achieves high relative sensitivity with a simple structure, and without relying on convection. In this embodiment of the invention, the accuracy of low pressure measurement is significantly improved by using sensing and compensating elements with substantially identical physical dimensions, thermal properties and resistance properties, and locating the sensing and compensating elements in the same vacuum environment. Using this design, the extreme complexity and cost of microminiature Pirani gauge designs and disadvantages associated with convection cooling of the

WO 2004/036169

PCT/US2003/032497

20

sensing element are simultaneously avoided. This improvement permits pressure measurement results up to atmospheric pressure comparable to those obtained with very complex microminiature Pirani gauges, and comparable to those obtained with much larger, position sensitive convection cooled Pirani gauges.

5 Improvement 2

As a second broad feature of the invention, an improved mounting arrangement is provided for the sensing and compensating elements. The accuracy of low pressure measurement is significantly improved by using sensing element and compensating element connections with substantially identical physical dimensions, thermal properties and resistance properties, and by using element connections with substantially identical and large thermal conductances to a region of substantially uniform temperature for all connections.

Fig. 5a is a greatly enlarged cross-sectional view of one end of gauge portion 10 where the sensing element 12 is supported by and electrically connected to sensing element connectors 20 and 20' and the compensating element 14 is shown supported by and electrically connected to compensating element connectors 22 and 22'. The section of Fig. 5a is taken along line 5a-5a in Figure 4a. Preferably, identical supports (as shown in Fig. 5a) are provided at each end of gauge portion 10.

Connectors 20, 20', 22 and 22' are preferably made of platinum ribbon, 0.001 in. thick by 0.060 in. wide. Plates 16 and 16' are preferably made of an electrically insulating material with a high thermal conductivity such as aluminum nitride.

Alternatively, sensing and compensating element connectors 20, 20', 22 and 22' can be electrically insulated from the plates 16 by thin electrically insulating layers 24 and 24' which may be a diamond-like coating on tungsten. In this case, Plates 16 and 16' may be made of a high thermal conductivity material such as tungsten. Preferably, the selected material has a thermal conductivity greater than 0.25 watts/cm/K.

Plates 16 and 16' are held in position by simple sheet metal clamps at each end (not shown). The clamps apply sufficient force to the plates 16 and 16' to embed the sensing element 12 and the compensating element 14 into the connectors 20, 20', 22 and 22' until the connectors 20 and 20', and 22 and 22' are in intimate contact.

WO 2004/036169

PCT/US2003/032497

21

Thus, the spacing S between the sensing element 12 and the surface of the plates 16 and 16' is determined by the diameter of the sensing element and the thickness of the thin ribbon connectors 20, 20', 22, and 22'. This feature of the present invention permits a sensing element smaller than a human hair to be spaced a comparable
5 distance from two flat surfaces, precisely and very inexpensively as well as providing electrical connections to additional circuitry.

Plates 16 and 16' provide a region of substantially uniform temperature, especially when isolated in vacuum with minimal thermal conductivity to the outside world. The thin ribbon connectors 20, 20', 22 and 22' provide identical dimensions,
10 short path and very large thermal conductances to said region of uniform temperature, thus satisfying several of the conditions for constancy of temperature gradient, γ , at the ends of the sensing element.

Sensing element 12 may be suitably tensioned as shown in Fig. 5b by a small diameter wire spring 26 which is loaded during assembly and bears on sensing
15 element 12 adjacent to said connector 21 of sensing element 12. Spring 28 is used in a similar manner to tension the compensating element 14. Springs 26 and 28 serve to maintain precise spacing of the sensing element 12 and compensating element 14 relative to plates 16 and 16' as ambient temperature changes. Sufficient slack must be built into the sensing element 12 and compensating element 14 assemblies to
20 prevent breakage due to differential thermal expansion of the elements 12 and 14 and the plates 16. Without the springs 26 and 28, this slack would change with ambient temperature, thus preventing maintenance of constant spacing S between the parallel plates 16 and 16' and the sensing and compensating elements, respectively, and causing measurement errors.

25 In the design according to this embodiment of the invention, Eq. 22 is partially satisfied by the fact that sensing element 12 and compensating element 14 are physically, electrically, and thermally identical. In addition, R_3 is set equal to R_4 in the embodiment of Fig. 6, which from Eq. 6 assures that $\beta=1$. Thus, Eq. 22 is fully satisfied at all times by this design.

Improvement 3

A third major feature of the invention is an apparatus and method for independently heating sensing element 12. This improvement is illustrated in Fig. 6 wherein a Wheatstone bridge 30 is modified to provide independent heating of sensing element 12. Prior art circuits, used with a compensating element with the same physical dimensions and made of the same material as the sensing element as in the present invention, cause the compensating element to operate not at ambient temperature but at the same temperature as the sensing element. Thus, Pirani gauges with the inventive improvements described above cannot achieve their accuracy potential using prior art heating circuits.

Referring now to Fig. 6, a Wheatstone bridge 30 with nodes A, B, C, and D is provided with sensing element 12 having resistance value R_S , connected between nodes B and C. Non-temperature sensitive resistance element 15 (having resistance R) and compensating element 14 (having resistance R_C) together make up resistance R_2 . R_2 and capacitor 36 are connected in series order between nodes C and D. Resistor 17 having value R_4 is connected between nodes A and B, and resistor 19 having value R_3 is connected between nodes A and D. Vacuum environment 34 encloses sensing element 12 and compensating element 14. AC voltage source 38 is connected between nodes B and D, and frequency selective detector 40 is connected between nodes A and C. DC current source 32 is connected between nodes B and C to provide current to node B. Controller 42 is connected, via automatic feedback linkages 46 and 47, so as to control DC current source 32 and so as to receive a voltage detection input from frequency selective detector 40 for purposes of that control.

Vacuum environment 34 encloses a portion 10 (as shown in Figures 4a and 4b and described above with reference to those Figures) comprising sensing element 12, compensating element 14, and plates 16 and 16'. In addition, the assembly method described previously with reference to Figs. 5a and 5b is preferably used in the circuit of Fig. 6. Element connectors 20 and 20' at one end of sensing element 12 (shown in Fig. 5a) are electrically connected to Point C in bridge circuit 30 of Fig. 6, while sensing element connectors 21 and 21' (not shown) at the other end of sensing element 12 are electrically connected to Point B in Fig. 6. Compensating element

connectors 22 and 22' at one end of compensating element 14 (shown in Fig. 5a) are electrically connected through capacitor 36 to Point D in Fig. 6, while the other end of compensating element 14 is connected to compensating element connectors 23 which are connected through a resistance 15 to Point C.

5 As shown in Fig. 6, DC current source 32 furnishes heating current I to sensing element 12 which is located in the vacuum environment 34. A capacitor 36 is provided as a means for preventing current from current source 32 from being present in R_2 , R_3 and R_4 . Thus, unlike prior art Pirani gauges using a conventional Wheatstone bridge, no portion of the heating current or heating voltage in R_S is
10 present in R_2 at any time.

AC voltage source 38 applies an AC signal voltage to bridge 30 producing AC signal currents i_5 , i_2 , i_3 , and i_4 . Using very small values for i_5 , i_2 , i_3 and i_4 and frequency selective detector 40, bridge balance can be detected with negligible heating produced in any arm of bridge 30. The DC current I from source 32 is
15 automatically adjusted by controller 42, so as to continually assure that the AC voltage drop $i_5 R_S$ from point B to C is equal to the voltage drop $i_4 R_4$ from B to A as measured by the AC voltage detecting function of frequency selective detector 40. This automatic feedback linkage is indicated by dashed lines 46 and 47.

Processor 51 is connected to current meter 49 and to voltage meter 48, and
20 produces an output indicative of pressure in the vacuum environment 34 based on the level of heating current and through sensing element 12 and the voltage drop across sensing element 12.

Thus, compensating element 14 may be made with the same physical dimensions and thermal and resistance properties as sensing element 12 and still
25 operate at ambient temperature without any pressure dependent electrical heating.

Improvement 4

A fourth improvement will be described with reference again to Fig. 6. In this improvement, an improved apparatus and method are provided for calibrating and operating the Pirani gauge according to the present invention.

WO 2004/036169

PCT/US2003/032497

24

The inventors have discovered that an accurate indication of an unknown pressure P_x at bridge balance may be calculated from a simple equation of the form of Eq. 26.

$$P = f(VS, IS) \quad (26)$$

- 5 This finding differs from more conventional approaches. Pressure indication has been considered to depend not only on resistance of the sensing element, but also on other factors such as ambient temperature. Thus, conventional calibration schemes often require measurements of resistance and other quantities, both for calibration and during operation. However, the inventors have discovered that when the
- 10 improvements described above are made, the values of VS and IS incorporate sufficient temperature information to produce an accurate pressure output, so that it is possible to eliminate the steps of separately measuring other parameters such as ambient temperature. In this manner, it is possible to use a three dimensional calibration table to determine pressure based on voltage and current alone.
- 15 In order to calibrate the gauge shown in Fig. 6, sensing element 12 is exposed to a series of known representative pressures and ambient temperatures spread over the pressure and temperature ranges of interest. The voltage drop, VS_C , as measured by voltmeter 48 and the current, IS_C , as measured by current meter 49 are recorded together at bridge balance with each of the known representative calibration
- 20 pressures, P_C . These values may be recorded by a program operating in processor 51 or may be transferred to another processing unit for calibration calculations. The pressure P_C is plotted against voltage VS_C and current IS_C . Each series of measurements at a given calibration temperature produces a constant temperature function relating pressure to voltage and current. Significantly, as noted above, the
- 25 inventors have discovered that these constant temperature functions can be usefully combined in a single three-dimensional data table to define a single calibration function of the form of Eq. 26. When this is done, the result is a series of points defining a surface, where the height of the surface is the pressure and is a function of measured voltage and current values.

The resulting calibration data may be stored in a lookup table and measured pressures can be determined by interpolating between pressure values stored in the lookup table based on the measured voltage drop and current. However, because of the number of points that must be stored to produce accurate output over a wide
5 range of pressures, in the preferred embodiment, an approximating equation is obtained for the surface on which the measured values lie. This can readily be accomplished using three-dimensional surface plotting software. The resulting equation is of the form shown in Eq. 26. Then, to measure an unknown pressure P_x at any temperature, VS_x is measured by voltmeter 48 and IS_x is measured by current
10 meter 49 at bridge balance. The correct value of pressure can then be readily obtained by substitution in Eq. 26 giving

$$P_x = f(VS_x, IS_x) \quad (27)$$

For convenience, Eq. 27 can be stored in processor 51 which can then be used to automatically calculate P_x when VS_x and IS_x are input to processor 51.

15 Those skilled in the art will appreciate that other quantities could be substituted for voltage and current within the scope of this invention. For example, a function of the form $P_x = g(W, R)$ where W is power applied to sensing element 12 and R is the resistance of sensing element 12 could be used in place of Equation 27. In this case, W and R can be calculated from the output of voltmeter 48 and current
20 meter 49. What is important is that the two selected parameters include information relating to both current and voltage, such that the effects of changes in current and voltage will be differentially reflected in the calibration graph or table created based on values of the two parameters. Thus, for example, the two input parameters for the function may be any two of a group including: power, current, voltage, and
25 resistance. To generalize, it is possible to identify an equation of the form

$$P = h(X, Y)$$

which approximates the calibration surface, where X is the first input parameter, Y is the second input parameter, and P is the pressure corresponding to values of the first

WO 2004/036169

26

PCT/US2003/032497

parameter X and second parameter Y. This equation is then used as a proxy for the multi-dimensional calibration surface to calculate the pressure.

This improvement provides excellent temperature compensation from 0°C to 50°C from pressures less than 10^{-4} Torr to above atmospheric pressure. It avoids the need to measure power and temperature as is sometimes done. It compensates for all types of ambient temperature change induced errors, such as change in radiation loss, not merely those losses dependent on changes in sensing element to wall temperature changes as is the case in U.S. Pat. 4,682,503. The improvement avoids the complexity of having to control the ambient temperature using thermoelectric cooling as described in U.S. Pat. 5,347,869. In addition, this improved calibration and operating method automatically compensates for the fact that the temperature coefficient of resistivity will be slightly different for the sensing element at operating temperature than for the compensating element at ambient temperature.

Further Embodiments

Referring to Fig. 7, gauge 60 is an embodiment of a gauge that differs from that depicted in Fig. 6 in that it does not employ a Wheatstone bridge. As in Fig. 6, gauge 60 includes a sensing element 12 (having a resistance value RS), a non-temperature-sensitive resistance element 15 (having a resistance R) and a temperature compensating element 14 (having a resistance RC), with elements 12 and 14 being positioned within a vacuum environment 34 in a similar manner or arrangement. Although the circuitry that connects elements 12, 14 and 15 in gauge 60 differs from that in Fig. 6, elements 12, 14 and 15 are utilized in a similar manner as in Fig. 6. For example, sensing element 12 is heated while non-temperature-sensitive resistance element 15 and temperature compensating element 14 are not heated significantly. In addition, the voltage VS across and the current IS through sensing element 12 are measured and utilized to determine pressure in a similar manner.

Gauge 60 includes a power source 61 for supplying power to current sources 62 and 64 via lines 74 and 76, respectively. Current sources 62 and 64 are interdependent and preferably provide DC current to element 12 and elements 14/15, respectively. Current source 64 provides a current of a magnitude or level that is a

WO 2004/036169

27

PCT/US2003/032497

predetermined fraction of that provided by current source 62. In the example shown in Fig. 7, current source 64 provides 1/10 the amount of current provided by current source 62.

The current I_S provided by current source 62 is directed through sensing
5 element 12 by way of line 78, node 80 and line 88. The fractional current provided by current source 64 is directed through non-temperature-sensitive resistance element 15 and temperature compensating element 14 by way of line 100, node 102 and line 103 (positioned between elements 14 and 15). As in Fig. 6, elements 14 and 15
10 compensate for ambient temperature changes. Directing a fraction of the sensing current I_S through the temperature compensating element 14 makes the temperature rise of the compensating element 14 insignificant relative to that of sensing element 12. In the example depicted in Fig. 7 where the ratio of the sensing current I_S to the
15 fractional current through temperature compensating element 14 is a ratio of 10:1, the power dissipated in the temperature compensating element 14 is less than 1/100 the power dissipated in sensing element 12 due to the squared relationship of current
to power (where $\text{Power} = I^2R$). As a result, the temperature rise of compensating element 14 is less than 1%, than that of sensing element 12. Although a current ratio of 10:1 for current sources 62 and 64 is described, other ratios less than or greater
than 10:1 may be employed. The current I_S is controlled to heat the sensing element
20 12 to a temperature level at which the resistance R_S increases to equal the combined resistance $R+R_C$. It is at that temperature that calibration data defines the environmental pressure. A feedback circuit maintains the current at that level.

Specifically, the voltage V_2 across the combined resistance $R+R_C$ indicative of the resistance $R+R_C$, is applied through a unity multiplier 66 (connected to nodes
25 102 and 98) to a summing circuit 70 while the voltage V_1 across the resistance R_S , indicative of the resistance R_S , is applied through a multiplier 68 (connected to nodes 84 and 92) to the summing circuit 70. Since $R=V/I$, and the current through $R+R_C$ is one tenth the current through R_S , the voltage across $R+R_C$ is one tenth the voltage across R_S when the resistances are equal. Therefore, to make a comparison
30 of the voltages to determine whether the resistances are equal, the voltage across R_S must be multiplied by one tenth of the multiplier applied to the voltage across $R+R_C$. The multiplier 68 multiplies the voltage V_1 by -.1 to assure that the multipliers have

WO 2004/036169

PCT/US2003/032497

28

an inverse ratio to the ratios of the current I_S and $I_S/10$. The negative multiplier 68 allows the summer circuit 70 to perform a subtraction of the normalized resistance voltages to provide an error signal 110 indicating a difference between the resistences. That difference is amplified in high-gain integrating error amplifier 72 and fed back to control the current level I_S . The output of the error-amplifier 72 is fed back in parallel to current sources 62 and 64 via line or feedback loop 112, node 114 and lines 116 and 118 to adjust the level of current provided by current sources 62/64 as necessary. The currents provided by current sources 62/64 are adjusted such that the resistences R_S of sensing element 12 and $R+RC$ of elements 15/14 maintain a predetermined equilibrium. In the example shown in Fig. 7, the resistences are matched such that $R_S=R+RC$. Alternatively, other ratios or resistance levels may be employed where R_S is less than or greater than $R+RC$. In addition, although a feed back circuit for controlling current sources 62/64 is preferred, alternatively, such a feedback circuit may be omitted with the database allowing for different voltage ratios. When the feed back circuit is omitted, the response time of the gauge 60 is typically slower.

The current through sensing element 12 is determined by current sensor 49, and the voltage V_1 across sensing element 12 due to that current is determined by sensor 48, which is connected to nodes 80 and 92 with lines 82 and 86. Elements 12 and 14 are connected to nodes 92 and 98 by lines 90 and 105, respectively, and line 86 is connected to ground by node 94. Sensor 48 and multipliers 66 and 68 have high input impedences so all current I_S flows through sensing element 12. As in the prior embodiment, current and voltage parameters can be used in a data base lookup to determine the pressure to which elements 12 and 14 are exposed.

Gauge 60 is calibrated in a similar manner as that described for the gauge depicted in Fig. 6 where sensing element 12 is exposed to a series of known representative pressures and ambient temperatures spread over the pressure and temperature ranges of interest. The voltage drop across sensing element 12 is measured by voltmeter 48 and the current therethrough is measured by current meter 49 while resistences R_S and $R+RC$ are maintained at a predetermined equilibrium for example, $R_S = R + RC$. These values are plotted to provide the three-dimensional data table and surface described in regard to Fig. 6.

WO 2004/036169

PCT/US2003/032497

29

As a result, in use, an unknown pressure can be determined by measuring voltage and current across sensing element 12 and then employing the methods described for the gauge of Fig. 6. For example, the values of voltage and current that are measured are compared to the stored calibration data which contains pressure values for particular voltage and current values. Typically, the measured values of voltage and current do not exactly match any of the values contained within the stored data. Consequently, the value of the measured pressure is determined by interpolation of the stored voltage/current/pressure calibration data. Preferably, an approximating equation such as Eq. 27 is employed to perform the interpolation. By storing Eq. 27 in the processor, pressure may be automatically calculated from the measured voltage and current across sensing element 12. As in the gauge of Fig. 6, quantities other than voltage and current may be employed for determining pressure within the scope of the invention.

Referring to Fig. 8, gauge 125 is an embodiment of a gauge in accordance with the present invention that differs from gauge 60 (Fig. 7) in that the positive (+) input of multiplier 66 is moved from node 102 to a new node 120 located between elements 14 and 15 as shown. In addition, a third multiplier 121 with gain K is included. Multiplier 121 is connected to node 102 and a new node 119 (located between elements 14 and 15) as shown. In this arrangement, the resistance of line 103 between elements 14 and 15 does not add an uncertain incremental value to the resistance R of element 15. As a result, line 103 can be a lengthy wire if required, and the resistance between nodes 119 and 120 remains substantially inconsequential to the accuracy of gauge 125. This allows element 15 to be positioned in more convenient locations such as on a printed circuit board of an electronics package rather than at the transducer and the resistance of the termination of the compensating element 14 need not be so tightly controlled. Furthermore, positioning element 15 away from the transducer allows element 15 to be in an environment that has a more stable temperature so that unintentional temperature sensitivities are minimized. The value of the resistance R of element 15 can be selected based on cost, convenience, or availability since the voltage drop across element 15 can be multiplied by any arbitrary value K by multiplier 121 to obtain the desired results.

WO 2004/036169

PCT/US2003/032497

30

Still further embodiments of the present invention can be configured such that the sensing element 12 and the temperature compensating element 14 are different in resistance as well as length. The sensing element 12 and the temperature compensating element 14 can be configured such that the resistance of the temperature compensating element 14 is slightly less than the sensing element 12, for example, up to about 10% less. It has been found that in some situations, a compensating element 14 which has slightly less resistance than the sensing element 12 can provide further improved ambient temperature compensation of the pressure signal over a compensating element 14 having a resistance matching the sensing element 12.

In one embodiment, where the sensing 12 and compensating 14 elements have equal lengths and resistances, the resistance of the compensating element 14 can be lowered to the desired amount by a trim resistor 126 that is electrically connected in parallel with the compensating element 14, and generally positioned externally to the sensed or measured environment. Fig. 9 depicts an example of a trim resistor 126 connected in parallel with the compensating element 14 shown in the circuit of Fig. 7, where parallel trim resistor 126 is connected to line 103 via line 124, and node 122, and to line 105 via line 128 and node 130. When the parallel trim resistor 126 is in parallel with compensating element 14, the resistor 126 becomes part of compensating element 14. In one embodiment, compensating element 14 is provided with about 4.5% lower resistance than sensing element 12 for providing temperature compensation optimized at about 300 mTorr. The addition of the parallel trim resistor 126 in parallel with the compensating element 14 changes both the temperature coefficient of resistance and the ohms/°C of the circuit leg of the compensating element 14.

In another embodiment, the compensating element 14 is made of the same material and is generally the same diameter as the sensing element 12 but is slightly shorter in length in order to provide the lower resistance relative to the sensing element 12. The length difference is determined empirically by comparison over a temperature range with a capacitance diaphragm gauge. The length mismatch difference is small enough so that the sensing 12 and compensating 14 elements still have similar temperature response and physical characteristics, but the shorter

WO 2004/036169

PCT/US2003/032497

31

compensating element 14 provides better temperature compensation. In one embodiment, the compensating element is about 6.4% shorter (about 6.4% less resistance) than sensing element 12, which temperature compensates the sensor voltage curve optimized at about 1 Torr. A shorter compensating element 14 has a
5 temperature coefficient of resistance (ohms/ohm/°C) that is the same as the sensing element 12 but the ohms/°C is different.

The optimum length and resistance mismatch between the sensing element 12 and the compensating element 14 can vary between different gauges depending upon the length, position, and spacing of the sensing 12 and compensating 14 elements, as
10 well as the proximity to other components. The length mismatch can be employed in any of the circuits previously described.

A parallel trim resistor 126 can be employed in situations for lowering the resistance of compensating element 14 where the length or resistance of compensating element 14 is less than the sensing element 12 but not to the full extent
15 desired. In addition, if the length or resistance of compensating element 14 relative to sensing element 12 is lower than desired, a parallel trim resistor 126 can instead be placed in parallel with sensing element 12 to reduce the resistance of the sensing element 12 so that the resistance of compensating element 14 is increased relative to the resistance of sensing element 12 to bring the relative resistances into the desired
20 range. In such a case, the parallel trim resistor 126 becomes part of the sensing element 12. Although the parallel trim resistor 126 has been described above as being employed in the circuit of Fig. 7, it is understood that the parallel trim resistor 126 can be employed in any of the other circuits described above.

While this invention has been particularly shown and described with
25 references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

For example, features of the different embodiments of the present invention may be substituted for each other or combined. In addition, although gauges 60 and
30 125 have been described to apply DC current to elements 12, 14 and 15, other embodiments of the present invention include applying AC current to elements 12, 14 and 15. Furthermore, although specific dimensions and specifications have been

WO 2004/036169

32

PCT/US2003/032497

provided, it is understood that the dimensions and specifications can be varied depending upon the situation at hand.

WO 2004/036169

PCT/US2003/032497

33

CLAIMS

What is claimed is:

1. A heat loss gauge for measuring gas pressure in an environment comprising:
a resistive sensing element;
5 a resistive compensating element in circuit with the sensing element
and being exposed to a substantially matching environment;
an electrical source connected to the sensing element and
compensating element for applying current through the elements, the current
through the sensing element being substantially greater than the current
10 through the compensating element, the sensing and compensating elements
being of different lengths; and
measuring circuitry connected to the sensing element and the
compensating element for determining gas pressure in the environment to
which the sensing element and compensating element are exposed based on
15 electrical response of the sensing element and the compensating element.
2. The gauge of Claim 1 in which the compensating element is shorter than the
sensing element.
3. The gauge of Claim 2 in which the sensing and compensating elements are
configured to provide the compensating element with about 5%-8% lower
20 resistance than the sensing element.
4. The gauge of Claim 3 in which the sensing and compensating elements are
configured to provide the compensating element with about 6%-7% lower
resistance than the sensing element.
5. The gauge of Claim 2 in which the compensating element is about 5%-8%
25 shorter in length than the sensing element.

WO 2004/036169

PCT/US2003/032497

34

6. The gauge of Claim 5 in which the compensating element is about 6%-7% shorter than the sensing element.
7. The gauge of Claim 1 in which a parallel resistor is positioned across one of the sensing and compensating elements for providing the compensating element with lower resistance.
8. A method of measuring gas pressure in an environment comprising:
providing a resistive sensing element;
providing a resistive compensating element that is in circuit with the sensing element and is exposed to a substantially matching environment;
applying current through the sensing element and compensating element from an electrical source, with the current through the sensing element being substantially greater than the current through the compensating element;
configuring the sensing and compensating elements to be of different lengths; and
with measuring circuitry connected to the sensing element and the compensating element, determining gas pressure in the environment to which the sensing element and compensating element are exposed based on electrical response of the sensing element and the compensating element.
9. The method of Claim 8 further comprising configuring the compensating element to be shorter than the sensing element.
10. The method of Claim 9 further comprising configuring the sensing and compensating elements to provide the compensating element with about 5%-8% lower resistance than the sensing element.
11. The method of Claim 10 further comprising configuring the sensing and compensating elements to provide the compensating element with about 6%-7% lower resistance than the sensing element.

WO 2004/036169

35

PCT/US2003/032497

12. The method of Claim 9 further comprising providing the compensating element with a length that is about 5%-8% shorter than the sensing element.
13. The method of Claim 12 further comprising providing the compensating element with a length that is about 6%-7% shorter than the sensing element.
- 5 14. The method of Claim 12 further comprising positioning a parallel resistor across one of the sensing and compensating elements for providing the compensating element with lower resistance.

The diagram shows a Wheatstone bridge circuit with four nodes: A (left), B (top), C (right), and D (bottom). A voltage source V_B is connected between nodes A and D. The bridge arms contain resistors R_1 (between A and B), R_2 (between B and C), R_3 (between A and D), and R_4 (between D and C). A dependent current source i_s is connected between nodes B and D, with its value given by $i_s = \alpha i_3$. The current i_3 is the current flowing through resistor R_3 from node A to node D. The current i_2 is the current flowing through resistor R_2 from node B to node C. The current i_4 is the current flowing through resistor R_4 from node D to node C. The current i_s flows from node B to node D.

The diagram shows a Wheatstone bridge with four vertices labeled A, B, C, and D. A voltage source V_B is connected across vertices A and C. The bridge arms contain resistors: R_2 and R_c are in series between A and B; R_3 and R_4 are in series between A and D; R_1 and R_s are in series between B and C; and R_5 and R_6 are in series between D and C. A galvanometer, represented by a circle with a diagonal arrow, is connected between vertices B and D. Currents are labeled: i_2 flows from A to B, i_3 flows from A to D, i_1 flows from B to C, i_4 flows from D to C, and i_s flows from B to D through the galvanometer.


A graph showing the distribution of heat loss components for a black body at 1000°C. The vertical axis is labeled 'LOG HEAT LOSS' and the horizontal axis is labeled 'LOG FREQUENCY'. The horizontal axis has major ticks at 10^{-6} , 10^{-5} , 10^{-4} , 10^{-3} , 10^{-2} , 10^{-1} , and 10^0 . A specific point on the horizontal axis is marked at 5×10^{-3} . Three curves are plotted: 'TOTAL LOSS' (the uppermost solid curve), 'RADIATION LOSS' (a dashed horizontal line), and 'GAS LOSS' (a solid curve that rises steeply at higher frequencies). The 'GAS LOSS' curve intersects the 'RADIATION LOSS' line at a frequency of 10^{-2} . Vertical dashed lines extend from the horizontal axis at 10^{-3} and 10^{-2} to the curves. Arrows point from the labels to their respective curves.

WO 2004/036169

PCT/US2003/032497

2/8

FIG. 3
PRIOR ART

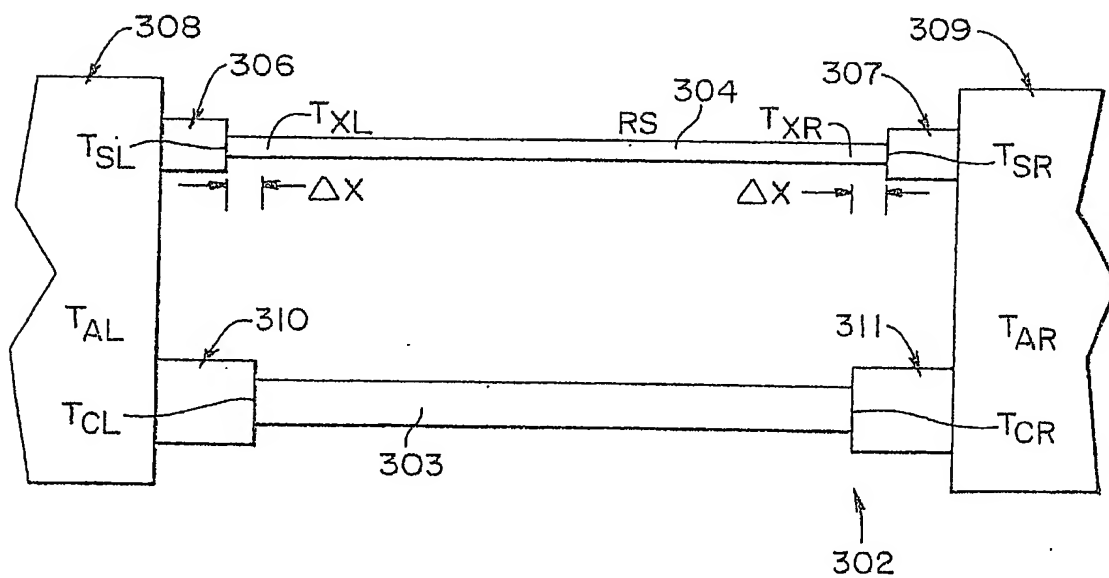

WO 2004/036169

PCT/US2003/032497

3/8

FIG. 4A

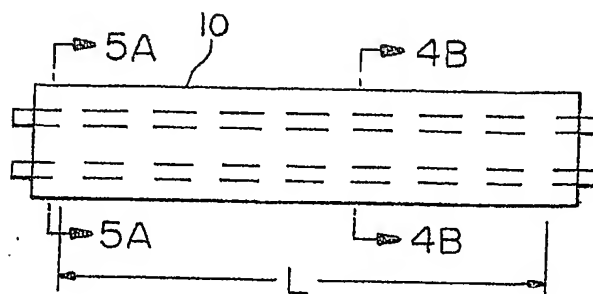


FIG. 4B




FIG. 5A


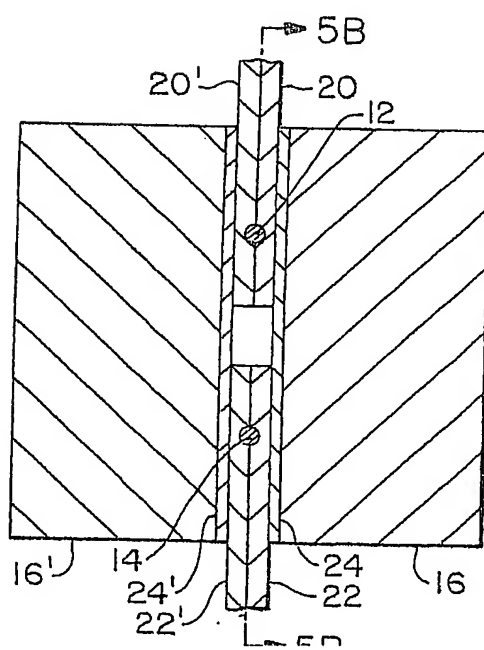


FIG. 5B

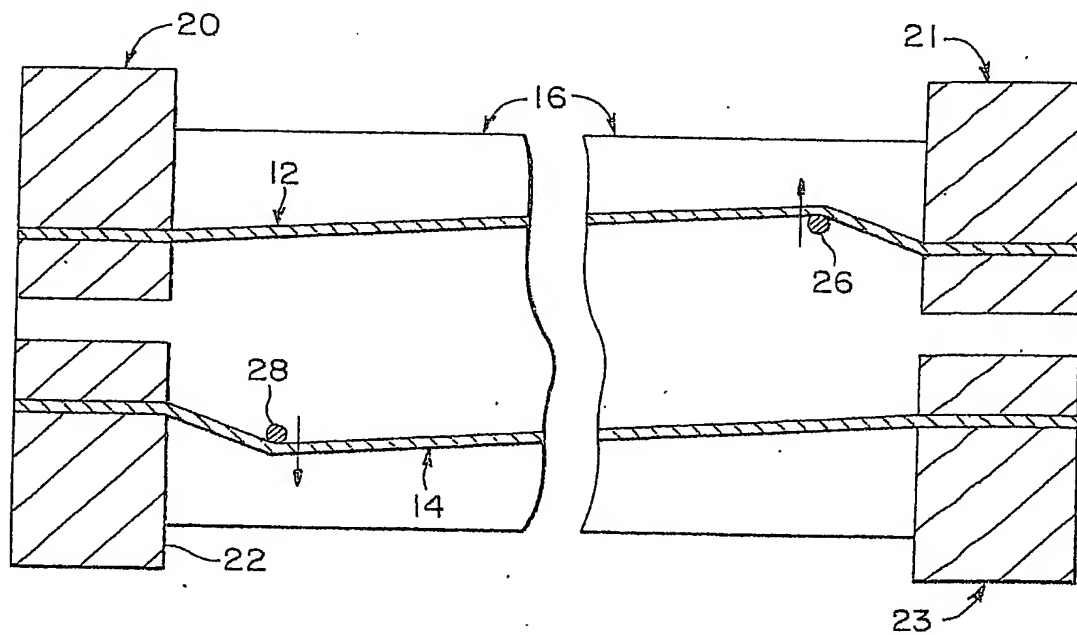


WO 2004/036169

PCT/US2003/032497

5/8

FIG. 6

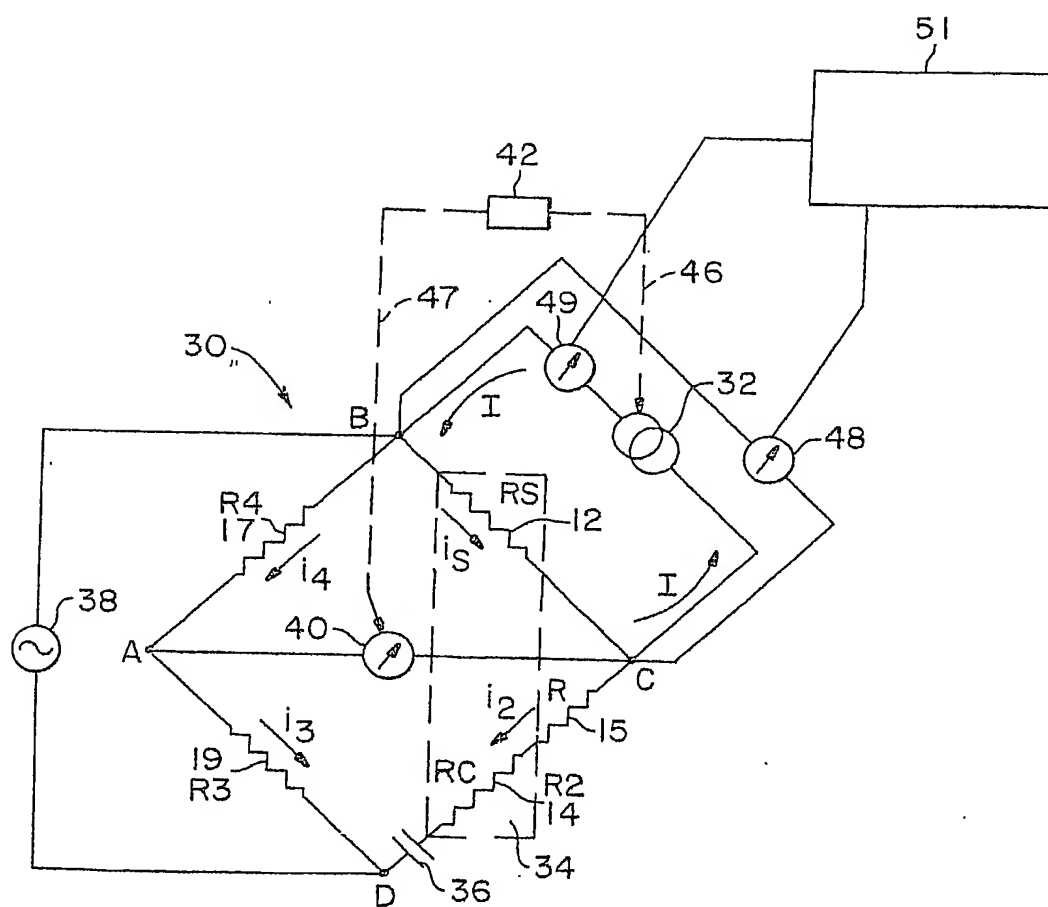

WO 2004/036169

PCT/US2003/032497

6/8

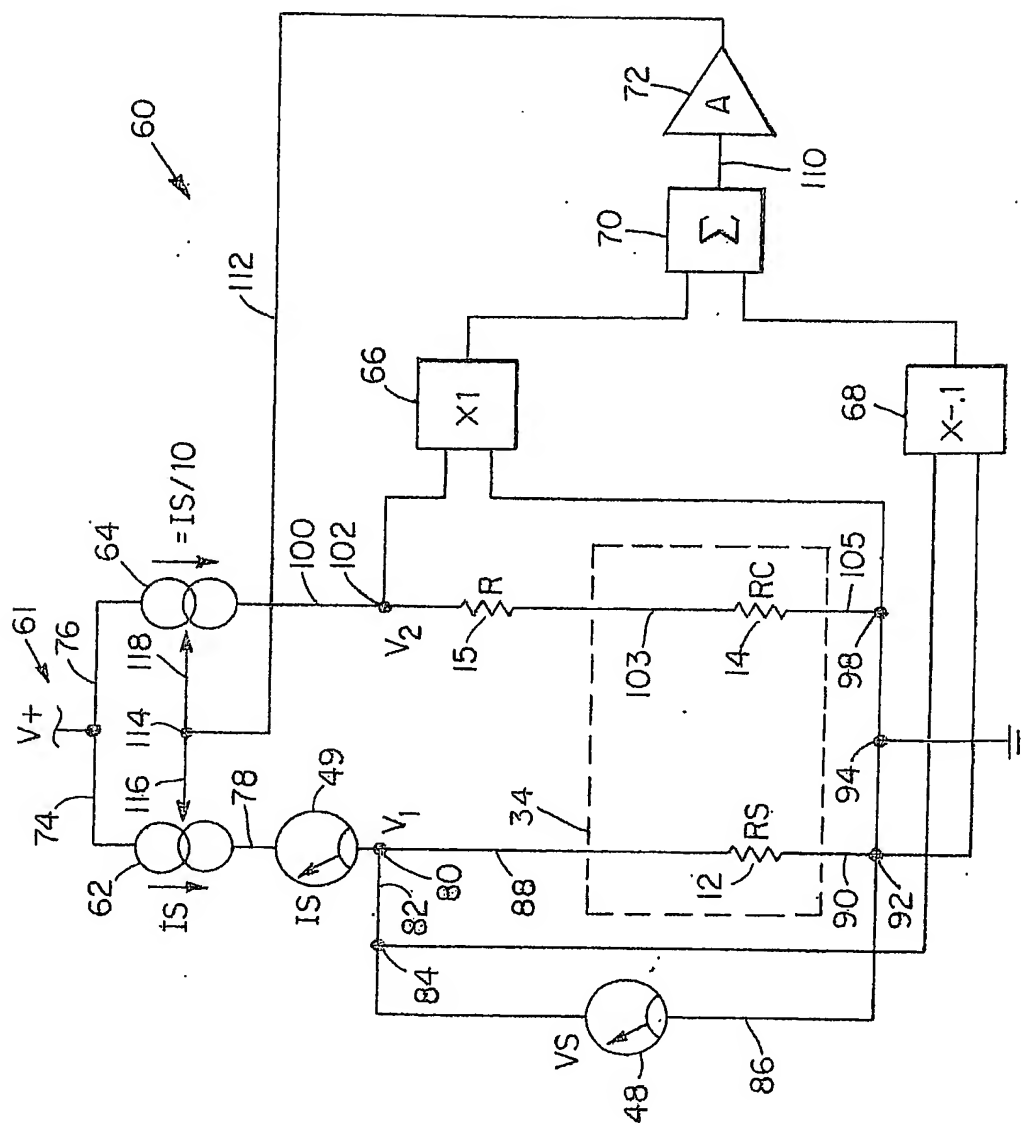


FIG. 7

WO 2004/036169

PCT/US2003/032497

7/8

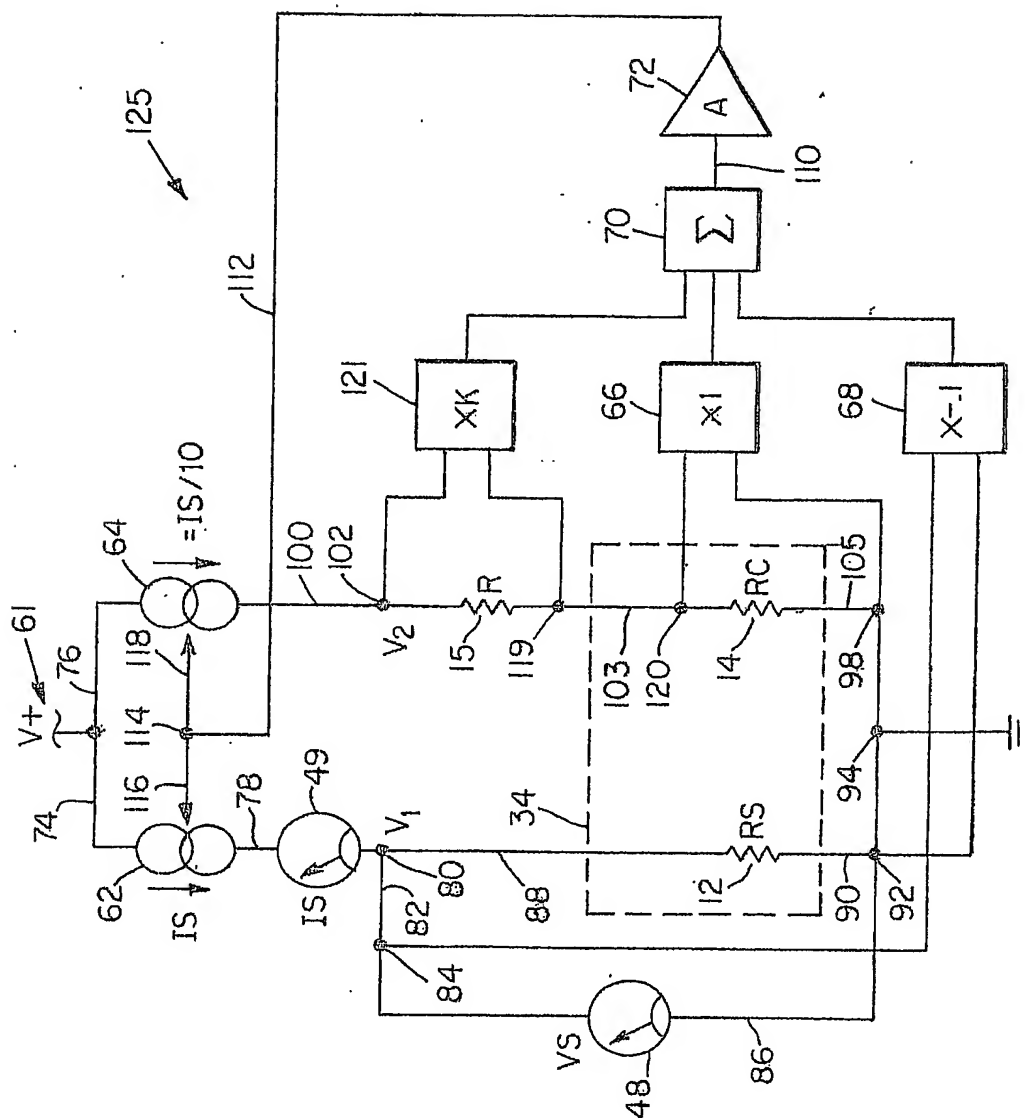


FIG. 8

WO 2004/036169

PCT/US2003/032497

8/8

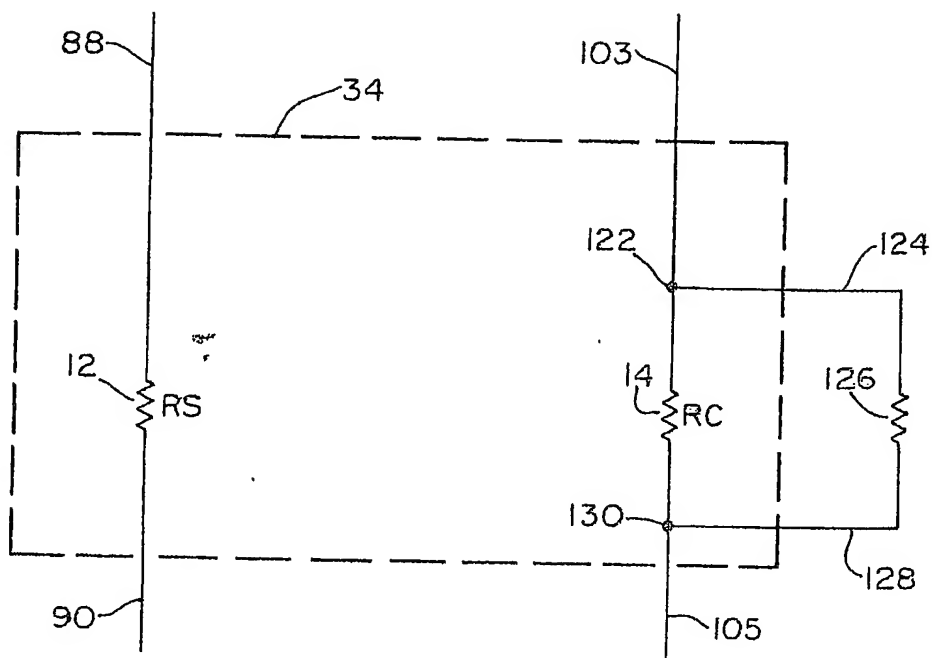


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/32497

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01L21/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 368 647 A (HELIX TECH CORP) 8 May 2002 (2002-05-08) the whole document	1-14
A	WO 97 41414 A (LEYBOLD VAKUUM GMBH ;KUESTER GERHARD (DE); ROLFF NORBERT (DE)) 6 November 1997 (1997-11-06) page 1, line 1 -page 3, line 25	1-14
A	US 5 347 869 A (SHIE JIN-SHOWN ET AL) 20 September 1994 (1994-09-20) cited in the application column 3, line 20 - line 48 column 4, line 52 -column 7, line 20 column 8, line 49 -column 9, line 57	1-14

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the International search

27 January 2004

Date of mailing of the International search report

12/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Coda, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/32497

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2368647	A	08-05-2002	US 6658941 B1	09-12-2003
			DE 10126373 A1	06-12-2001
			FR 2809812 A1	07-12-2001
			FR 2829237 A1	07-03-2003
			GB 2375825 A ,B	27-11-2002
			JP 2001343302 A	14-12-2001
			US 2003097876 A1	29-05-2003
WO 9741414	A	06-11-1997	DE 19617238 A1	06-11-1997
			WO 9741414 A1	06-11-1997
			EP 0896659 A1	17-02-1999
			JP 2000509151 T	18-07-2000
US 5347869	A	20-09-1994	DE 4310324 A1	06-10-1994